

SPECIFICATIONS — CATCH BASIN




MEASUREMENTS	STAINLESS & GALVANIZED	FIBERGLASS
Top Width	12"	12"
Top Length	12"	12"
Bottom Width	12"	10"
Bottom Length	12"	10"
Height	20"	20"
Outlet Height	4" or 6"	4" or 6"
Outer Edge of Frame	15"	15"

— Catch basins are constructed from either fiberglass, galvanized steel or stainless steel as 12"×12"×20" deep, and are available with 4 inch and 6 inch outlets.

— Basins come with a reinforced cover and can withstand heavy traffic loads.

— The exposed surface of the catch basin frames are made from T304 stainless steel. They have rebar tie-ins for easy installation.

SPECIFICATIONS — SLOT DRAIN® PROFILES

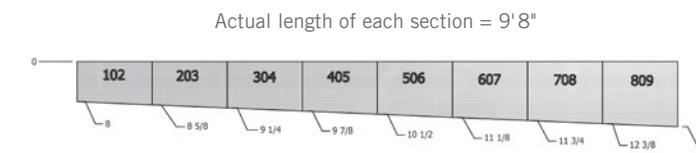

STAINLESS / GALVANIZED SLOT DRAIN® SECTION	INVERT SHALLOW	INVERT DEEP
102	8	8 5/8
203	8 5/8	9 1/4
304	9 1/4	9 7/8
405	9 7/8	10 1/2
506	10 1/2	11 1/8
607	11 1/8	11 3/4
708	11 3/4	12 3/8
809	12 3/8	13


— T304 stainless steel drain channels are 9'6" long, 6" wide and are available in 1/2", 1" and 1 1/4" wide throat openings.

— Drain bodies are either made of T304 or T316 Stainless Steel or galvanized sheet, both with stainless steel interlocking ends and a radiused bottom.

— The surfacing areas and drain frame are made from T304 Stainless steel.

— Drain channels are built with a .5% built-in slope and inverts start at 8 inches and continue to unlimited lengths. End caps and catch basins complement the channels. End outlets, bottom outlets and side outlets are available in 2", 3", 4" and 6" diameters.

— Inserts for flushing are optional items.

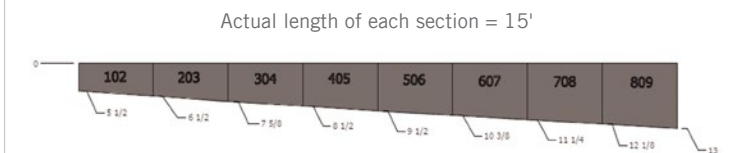

FIBERGLASS SLOT DRAIN® SECTION	INVERT SHALLOW	INVERT DEEP
102	5 1/2	6 1/2
203	6 1/2	7 5/8
304	7 5/8	8 1/2
405	8 1/2	9 1/2
506	9 1/2	10 3/8
607	10 3/8	11 1/4
708	11 1/4	12 1/8
809	12 1/8	13

— Drain channels are 15' long, 6" wide, and are available in 1/2", 1" and 1 1/4" wide throat openings.

— Drain bodies are made of fiber reinforced fiberglass, with interlocking ends and a radiused bottom. The surfacing areas and drain frame are made from T304 Stainless steel.

— Drain channels are built with a .5% built-in slope and inverts start at 5.5 inches and continue to unlimited lengths. End caps and catch basins complement the channels. End outlets, bottom outlets, and side outlets are available in 2", 3", 4" and 6" diameters.

— Inserts for flushing are optional items.